



IT'S NOT BORING.



IT'S NOT BLAH.



IT'S NOT BEIGE.



IT'S NOT BASIC.



IT IS Panasonic.

“#1 Copier in Overall Customer Satisfaction Among Business Users”




Panasonic ideas for life

Panasonic received the highest numerical score in the proprietary J.D. Power and Associates 2006 Business Copier Customer Satisfaction StudySM. Study was based on a total of 1,524 responses, measuring 10 manufacturers and measures opinions of business customers at small, medium, large businesses who purchased or leased a new copier in the previous 21 months. Proprietary study results are based on experiences and perceptions of those surveyed from January 2005 - September 2006. Your experiences may vary. For J.D. Power and Associates award information, www.jdpower.com.

Panasonic Full Color C3 Series MFP

Base Model	System	Main Unit Includes
DP-C354S2RED DP-C354S2B DP-C354S2Y DP-C354S2K	35/26-PPM Panasonic Full Color C3 Series MFP 35 B&W prints per minute 26 Color prints per minute	<ul style="list-style-type: none"> Full Color printing, scanning and copying SD/PC Card Interface Stackless Duplexing USB 2.0 Port 10Base-T/100-Base-TX Ethernet Network Interface Developer and Drums standard 4 x 550-sheet Paper Feed Tray plus 50-Sheet Bypass PCL6 Printing System 40GB Hard Disk Drive 512MB Main Memory 85-Sheet Inverting Automatic Document Feeder Panasonic Document Management System software (P-DMS)
DP-C264S2RED DP-C264S2B DP-C264S2Y DP-C264S2K	26/26-PPM Panasonic Full Color C3 Series MFP 26 B&W prints per minute 26 Color prints per minute	

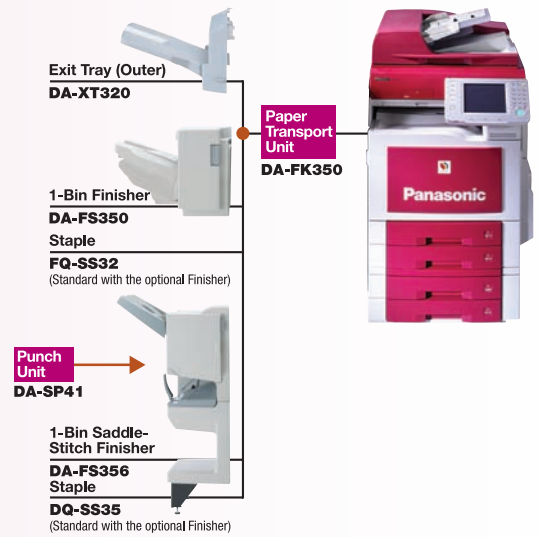

Specifications

General	
Type	Semi Console
Copy/Print Process	Laser Indirect Electrostatic
Developing Process	Dry Dual Component
Fusing Method	Induction Heating (IH) System
Inverting Automatic Document Feeder	85 sheets (8.5" x 11", 20 lb)
Paper Feed	Std. 550-sheet Paper Tray Unit x 4 + 50 sheet Bypass Max. 2,250 sheets
Paper Weight	Paper Tray: 18 to 28 lb – Bond Paper (64 to 105 g/m ²) Bypass: 15 to 40 lb – Bond Paper (55 to 220 g/m ²) 90 to 121 lb (Index Paper)
Media Interface	SD Card Max. 1GB PC (PCMCIA) Card Type 2, 3, 3V
Power Requirements	AC 120V, 12A, 50/60 Hz
Power Consumption	Maximum: Less than 1.44kW Power save mode: Approx. 75 W Sleep mode: Approx. 35 W
Warm-up Time (68F/20°C)	Approx. 15 sec.
Dimensions (W x D x H) (Excluding optional equipment)	25.8" x 32.5" x 36.7" (656 mm x 825 mm x 933 mm) (Including Automatic Document Feeder and ADF mounting bracket)
Weight (Excluding optional equipment) ¹	Approx. 360.8 lb (164 kg)

Digital Copier	
First Copy Time	B/W: Approx. 6.2 sec. (8.5" x 11") (DP-C354) Approx. 7.3 sec. (8.5" x 11") (DP-C264) Color: Approx. 10.3 sec. (8.5" x 11")
Resolution	Max. 600 dpi
Gray Scale	256 steps
Multi Copy Speed ²	B/W: Up to 35 cpm (DP-C354) Up to 26 cpm (DP-C264) Up to 26 cpm Color: Up to 26 cpm
Maximum Original Size	11" x 17"
Copy Size	11" x 17" – 5.5" x 8.5"
Copy Ratio	Enlargement: (fixed) 200%, 155%, 129%, 121% Reduction: (fixed) 79%, 77%, 65%, 61%, 50%
Zoom (variable)	25%–400% (in 1% increments)
Multiple Copy	1 to 999, Automatic reset to 1
Exposure Control	Text, Text / Photo, Photo
Sort Memory	Standard: 12 GB

Printer	
Network Printer Interface	Ethernet 10Base-T/100Base-TX
Communication Protocol	TCP/IP (LPD [Port9100/Raw], SNMP, DHCP, SMB), IPX/SPX (NDS, Bindery, NDPS), AppleTalk (PS), IPP (PCL, PS), IPv4/IPv6 Dual Stack
Local Printer Interface	USB 2.0
Printer Language	(standard) PCL 6 Emulation (option) Adobe® PostScript®3™ ³
Printing Speed ²	B/W: Up to 35 ppm (DP-C354) Up to 26 ppm (DP-C264) Color: Up to 26 ppm
Paper Size	Paper Tray: 11" x 17" – 5.5" x 8.5" Bypass: 12" x 36" ⁴ , 5.5" x 8.5"
Printing Resolution	1,200 x 1,200 dpi ⁴ , 600 x 600 dpi
Printer Memory	Standard: 512 MB
PCL/PS Spool Memory	2 GB
Compatible Client Operating Systems	Windows Vista®, Windows® XP/2000/Server 2003, 98, Me, Windows NT® 4.0, MacOS 8.6–10.4 ⁵ (PS only)
Compatible Network Operating Systems	Windows NT® 4.0, Windows® 2000, Server 2003, (Linux (LPR), Linus (LPR), Novell 3.x/4.x/5.x/6.x)

Network Scanner / Scan-to-Email	
Network Scanner Interface	Ethernet 10Base-T/100Base-TX
Communication Protocol	TCP/IP (LPR, FTP), SMTP, LDAP, SSL IPv4/IPv6 Dual Stack (IPv6: HTTP, SMTP)
Maximum Scanning Size	11" x 17"
Scanning Speed ⁴	B/W: Up to 35 opm (Letter) Color: Up to 31 opm (Letter)
Scanning Resolution	200 x 200 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi
Compatible Client Operating Systems	Windows Vista®, Windows® XP/2000/Server 2003, 98, Me, Windows NT® 4.0
Data Format	B/W: TIFF, PDF Color: JPEG, PDF, Compressed PDF (300 x 300 dpi only)
Address Book Capacity (including Network scanner, Scan-to-Email, G3 Fax and Internet Fax)	200 stations Max. 1000 stations

G3 Fax (Option) / Internet Fax (Option)	
Compatibility	G3 Fax: ITU-T Group 3, ECM Internet Fax: ITU-T T.37, IETF RFC 3965
Communication Protocol	TCP/IP, SMTP, POP3, MIME, LDAP (Internet Fax)
Modem Speed	33.6 kbps – 2.4 kbps with automatic fallback (G3 Fax)
Coding Scheme	JBIG / MMR / MR / MH (Conforms to ITU-T Recommendations)
Scanning Speed ⁴	Approx. 0.7 sec. (8.5" x 11" portrait in Standard or Fine mode with ADF)
Transmission Speed ⁶	Approx. 2.9 sec.
Scanning Resolution	Standard: 203 dpi x 98 lpi (8 dots/mm x 3.85 lines/mm) Fine: 203 dpi x 196 lpi (8 dots/mm x 7.7 lines/mm) Super Fine: 406 dpi x 391 lpi (16 dots/mm x 15.4 lines/mm) 600 dpi: 600 x 600 dpi
Maximum Original Size	11" x 17"
Effective Scanning Width	11.5" (292 mm)
Recording Resolution	600 x 600 dpi
Standard Memory ⁷	3 MB (approx. 180 pages based on ITU-T Image No. 1 using Standard Resolution)
Optional Memory	64 MB – 1 GB (SD card)
Data Format	TIFF-FX (Profile S/F/J) (Internet Fax)

Printer/Scanner/Email Options	
Printer Controller Module (for Adobe® PostScript® 3™ ³)	DA-MC350
DDS Unlock Module	DA-UK10

FAX / Internet Fax Options	
Fax Communication Board with Internet Fax	DA-FN350

Memory Options	
Page Memory (256 MB)	DA-PMN56

Software Options	
Accounting Software	DA-WA10
Document Distribution System	DA-WR10
Remote Operation Panel Software	DA-UD320

Security Options	
Data Security Kit	DA-SC03

Consumables	
Toner Cartridge (Black)	DQ-TUS28K
Toner Cartridge (Cyan)	DQ-TUS20C
Toner Cartridge (Magenta)	DQ-TUS20M
Toner Cartridge (Yellow)	DQ-TUS20Y
Toner Waste Container	DQ-BFN45
OPC Drum Unit (Black)	DQ-UHS36K
OPC Drum Unit (Color)	DQ-UHS30
Staples for DA-FS356	DQ-SS35
Staples for DA-FS350	FQ-SS32

¹ Dimensions and weight are approximate.
² Speeds are contingent upon applications, machine configuration, and status. Individual speeds may vary.
³ Requires optional Printer Controller Module.
⁴ Requires optional page memory.
⁵ Scanning speed applies to the feeding process from the top to the end of a single page test chart. The time for the feeding process does not include the time that it takes for the top edge of the page to reach the scanning point and page ejection. Time for entire storing process is not applied.
⁶ Transmission time applies to memory transmission of text data using only ITU-T Image No. 1 between the same models at maximum modulation speed. Transmission time may vary in actual usage. Usually public telephone lines can only support communication speeds of 28.8 Kbps or lower. Via PBX, transmission speed may fall back to a lower speed.
⁷ Based on ITU-T Image No. 1 scanned in Standard mode.
 Design and specifications are subject to change without notice.
 Microsoft®, Windows®, Windows Vista®, and Windows NT® are registered trademarks of Microsoft Corporation. Adobe®, PostScript®, PostScript® 3™, PDF and PostScript logo® are trademarks of Adobe Systems, Inc. Novell NetWare® and Novell Directory Services® are registered trademarks of Novell Inc., in the United States and other countries.
 PCL® is a registered trademark of Hewlett-Packard.
 All other brand or product names are the property of their respective holders.
 IPv6 Ready Logo is the international IPv6 product's certification program managed by the IPv6 Ready Logo Committee.
 This Product is designed to reduce hazardous chemical substances along with the RoHS directive.



Panasonic Communications Company of North America
 Unit of Panasonic Corporation of North America
 One Panasonic Way, Secaucus, NJ 07094

For a local dealer, please call 1-800-742-8086
 www.panasonic.com/office



As an Energy Star® partner, Panasonic has determined that this product meets the Energy Star® guidelines for energy efficiency.



ISO 9001 Quality Management System

Our business processes which produce document, information and network products, from manufacturing to marketing, conform to ISO9001 Quality Management Systems standard. Design, development, manufacture, installation, repair and maintenance of document, information and network products, their associated devices and consumables. In addition, the plants outside Japan have acquired ISO 9001 certification.